


**Generator set  
Sound-proof type  
WPS350S-AU**

## **SPECIFICATIONS**



## 1 Standards & Conditions

### Design Standards

The designs and the productions are in conformity with:

- Conformite Europeenne (CE)
- ISO8528-5:2005
- GB/T2820.5-2009
- AS3000-2018
- AS3010.1-2017

- Remote run connector
- 2x12V/120AH sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder coated canopy
- 50°C radiator
- Oil pump on the engine
- Non-returning valve for fuel inlet hose of the engine
- Steel base frame with forkslots
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Base fuel tank for 22 hours running
- Drain points for fuel tank
- Breather valve for fuel tank
- Operation Manual / Specifications

### Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 45°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 90%.
- Altitude: Below one thousand (1000) meters above sea level.

### Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

### Painting Process


- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.

## 2 General Features

- Perkins engine 2206C-E13TAG2
- Close coupled to a Leroy Somer alternator LSA47.2VS1
- Microprocessor control module PLC-7420
- ABB main circuit breaker: 630A
- Rotate speed governor: Electronic fuel injection governor
- Excitation System: Self Excited
- A.V.R.Model: R250
- Key switch
- Emergency stop switch
- ATS (automatic transfer switch) receptacle

## 3 Equipment Specification

### General technical data

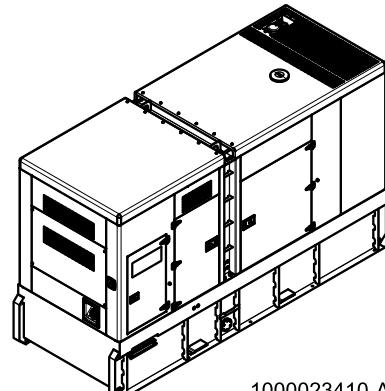


1000023410-AP1-B5

Model.....	WPS350S-AU
Structure type .....	R
Tank capacity.....	1650L
Dry weight.....	4659kg
Sound pressure level @1m/ 7m .....	90.3dB(A)/80.1dB(A)
Sound power level acc. 2000/14/EC .....	108dB(A)
Dimensions L×W×H.....	4242x1573x2476mm
Standby Power .....	385kVA/308kW
Prime Power .....	350kVA/280kW
Voltage/Current.....	415V/417A

Genset Fuel Consumption						
Frequency/Load	25%	50%	75%	100%	110%	
50Hz (L/h)	N/A	41	59	76	87	


## Diesel engine

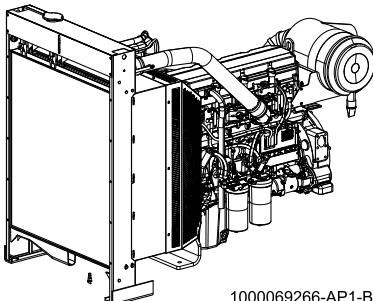

1000069266-AP1-B3

Engine Manufacturer/Brand.....	Perkins
Engine Model.....	2206C-E13TAG2
Dimensions L×W×H.....	.2410×1120×1725mm
Dry Weight (approx.) .....	1478Kg
Number of Cylinders.....	6
Bore .....	130mm
Stroke .....	157mm
Displacement.....	12.5L
Compression Ratio.....	16.3
Type of injection.....	Direct injection
Intake System.....	Turbocharged,air-to-air charge cooled
Intake Resistance.....	N/A
Cooling System .....	Water cooled
Fan .....	Pusher
Battery Voltage .....	24V
Type of Fuel....	BSEN590 or ASTM D975 Class 1D and 2D.
Type of Oil .....	15W40 to API CI4.
Oil Capacity .....	40L
Type of Coolant .....	Glycol mixture
Coolant Capacity .....	51.4L
Heat Rejected To Exhaust System	251.8kW(14101BTU/min)
Heat Rejected To Water&Oil.....	118.4kW(6630BTU/min)
Back Pressure .....	N/A
Standby Power .....	320kW
Prime Power .....	280kW
Fuel Consumption(100%load).....	75L/h


## Alternator



1000103169-AP1-A1

Alternator Manufacturer/Brand .....	Leroy Somer
Alternator Model .....	LSA47.2VS1
Exciter.....	Brushless
Cooling Fan .....	Cast alloy aluminum
Windings .....	.100% copper
Insulation Class .....	H
Winding Pitch.....	2/3
Terminals .....	12
Drip Proof .....	IP23
Altitude.....	≤1000m
Overspeed .....	.2250rpm
Air Flow.....	0.9m³/s(50Hz),1.1m³/s(60Hz)
Voltage Regulation .....	±0.5%
Total harmonic TGH / THCat no load < 1,5 % - on load < 2 %	
Telephone Interference.....	THF<2%;TIF<50

## PLC-7420 Control System

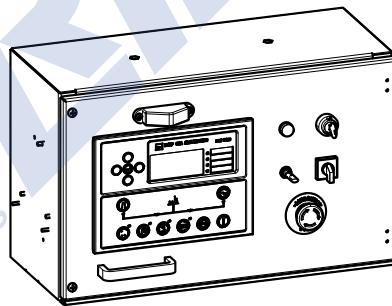


1000191019-AP1-B2

PLC-7420 is an advanced control module based on microprocessor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, and automatically start the engine when the mains is abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.


- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol

## 4 Overall Dimensions


1000023410-DR1-B5

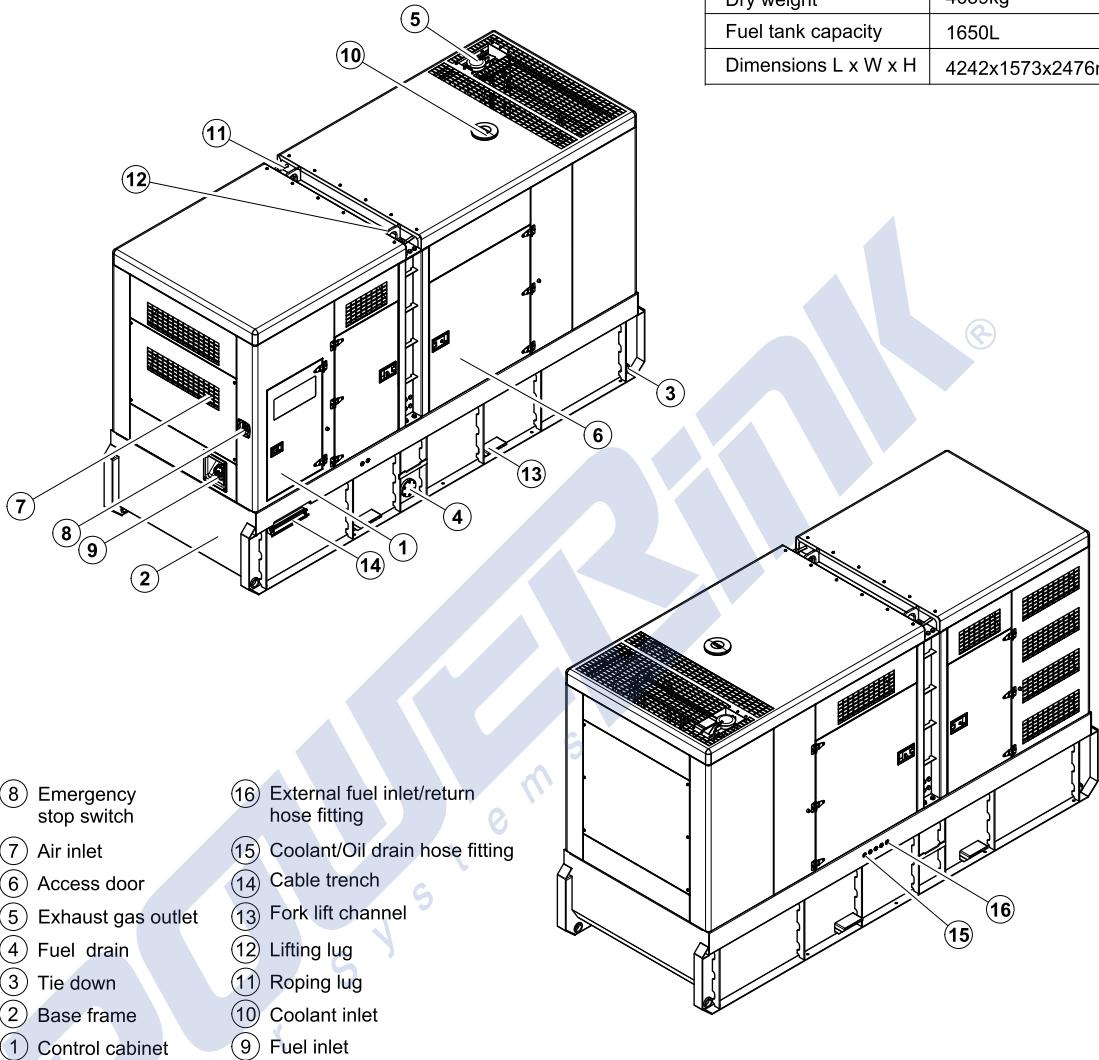

Dry weight	4659kg
Fuel tank capacity	1650L
Dimensions L x W x H	4242x1573x2476mm

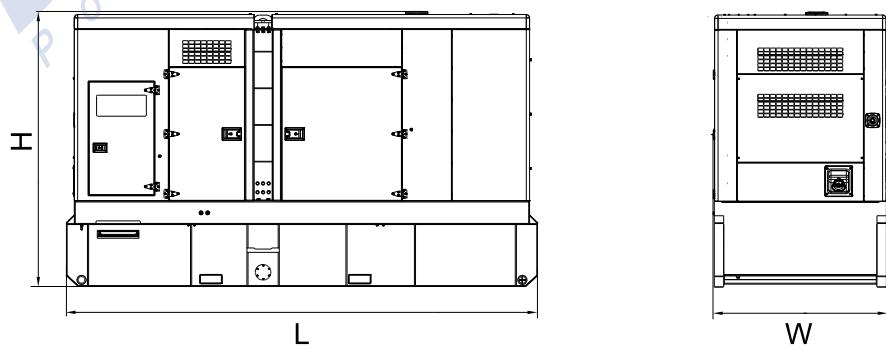

## 5 Control System

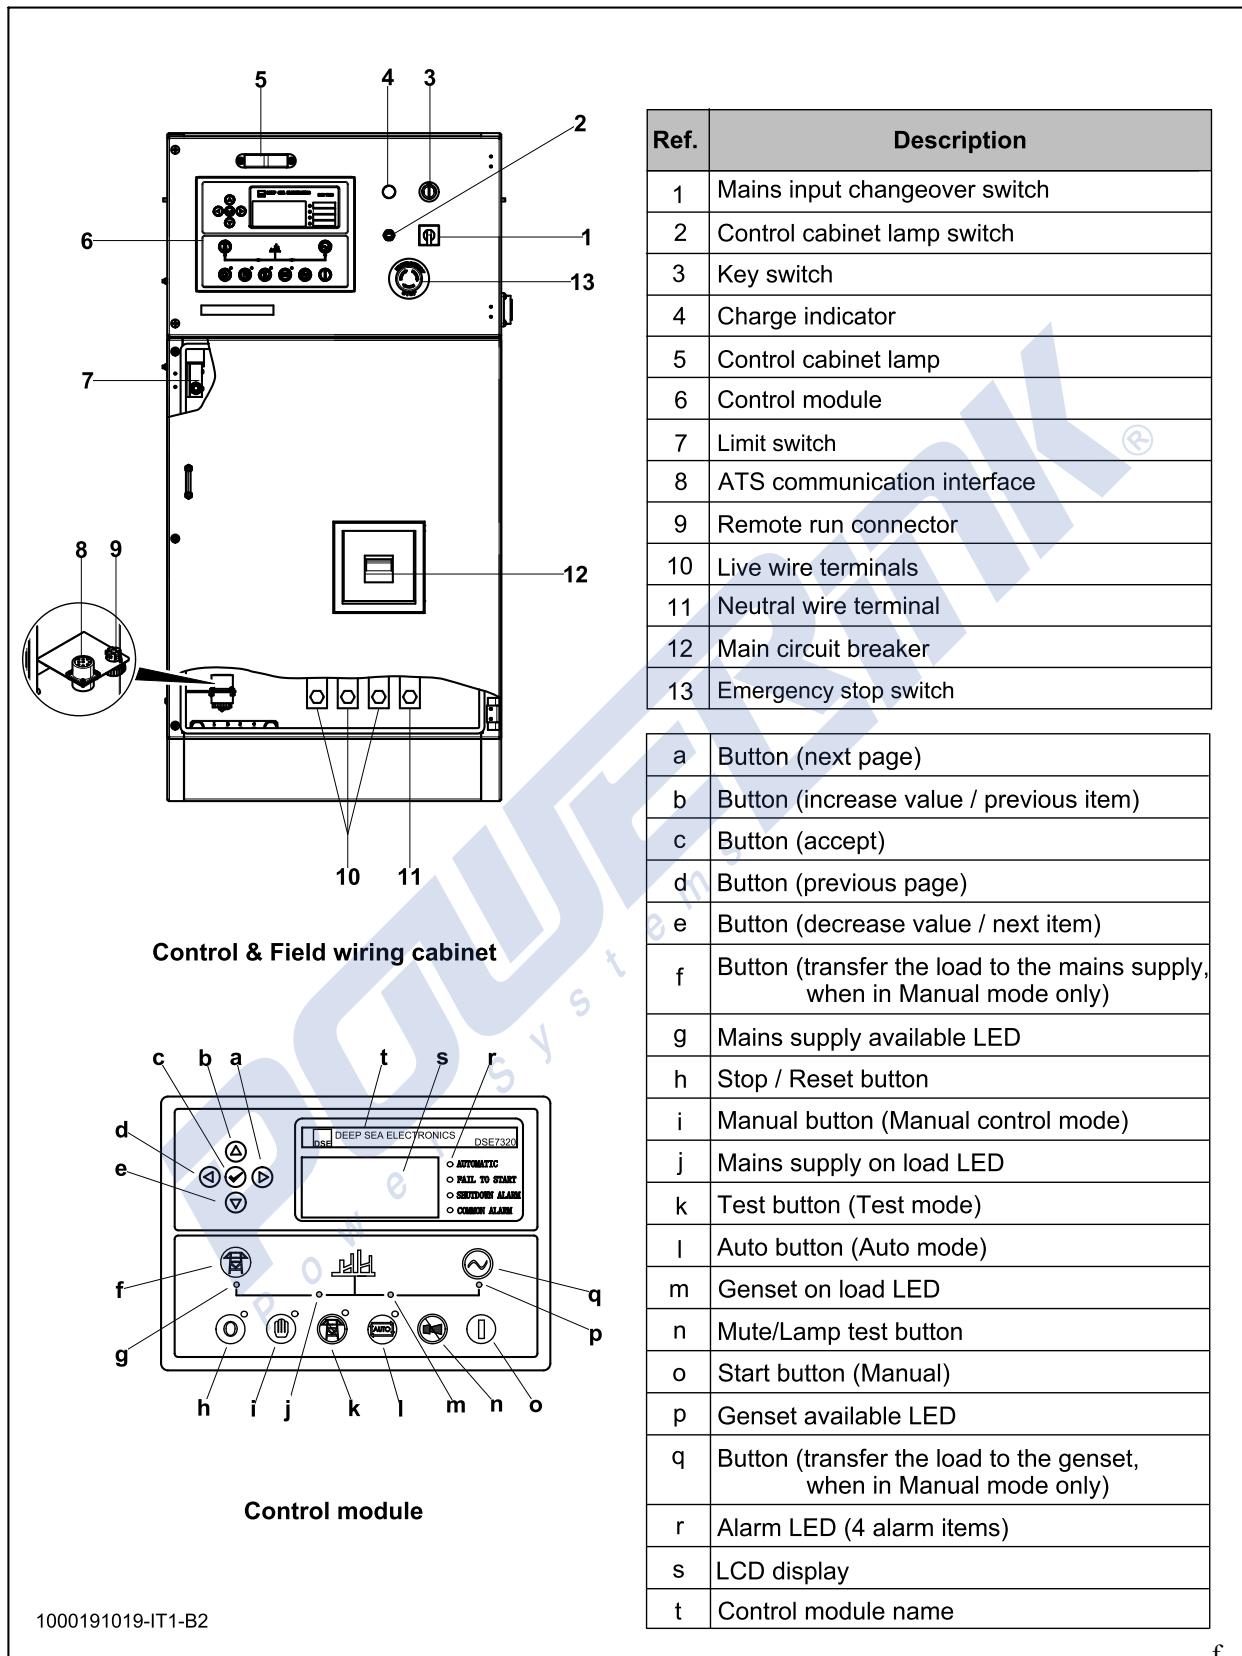

1000023410-B5-E
06.2019

<http://www.powerlinkworld.com>

*Specification may change without prior notice. For more info.,  
contact Power Link or your local distributors please.*