


Generator set
Sound-proof type
WPS200BS-AU

SPECIFICATIONS



1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- Conformite Europeenne (CE)
- ISO8528-5:2005
- GB/T2820.5-2009
- AS3000-2018
- AS3010.1-2017

- Remote run connector
- 1x12V/120AH sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder coated canopy
- 50°C radiator
- Oil pump on the engine
- Non-returning valve for fuel inlet hose of the engine
- Steel base frame with forklift slots
- Vibration isolators between the engine/alternator and baseframe
- Dry type air filter
- Base fuel tank with 24 hours running
- Drain points for fuel tank
- Breather valve for fuel tank
- Operation Manual / Specifications

Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 90%.
- Altitude: Below one thousand (1000) meters above sea level.

Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

Painting Process


- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.

2 General Features

- Perkins engine 1106A-70TAG4
- Close coupled to a Leroy Somer alternator LSA46.3S3
- Microprocessor control module PLC-7420
- ABB main circuit breaker: 320A
- Rotate speed governor: Electrical governor
- Excitation System: Self Excited,SHUNT
- A.V.R.Model: R250
- Key switch
- Emergency stop switch
- ATS (automatic transfer switch) receptacle

3 Equipment Specification

General technical data

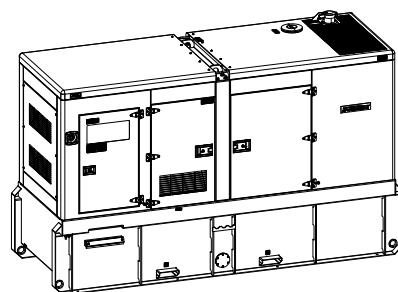


1000024483-AP1-D2

Model.....	WPS200BS-AU
Structure type	R
Tank capacity.....	1087L
Dry weight.....	2976kg
Sound pressure level @1m/7m	84.3/76.9dB(A)
Sound power level acc. 2000/14/EC	104dB(A)
Dimensions L×W×H.....	3518x1222x2153mm
Standby Power	220kVA/176kW
Prime Power	200kVA/160kW
Voltage/Ampere	415V/278.2A

Genset Fuel Consumption					
Frequency/Load	25%	50%	75%	100%	110%
50Hz (L/h)	N/A	25	36	45.8	49.4


Diesel Engine

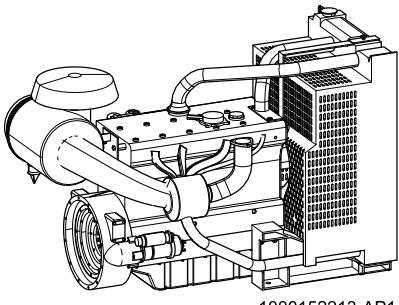

1000152213-AP1-A2

Engine Manufacturer/Brand.....	Perkins
Engine Model.....	1106A-E70TAG4
Dimensions L×W×H.....	1763×756×1142mm
Dry Weight (approx.)	788kg
Number of Cylinders.....	6
Bore	105mm
Stroke	135mm
Displacement.....	7.01L
Compression Ratio.....	16
Type of Injection	Direct injection
Intake System.....	Turbocharged and air charge cooled
Intake Resistance.....	≤8kPa
Cooling System	Water cooled
Fan	Pusher
Battery Voltage	12V
Type of Fuel.....	ASTM D975, Class 1D & Class 2D
Type of Oil	API-CH4/ACEA E5
Oil Capacity	16.5L
Type of Coolant	Glycol mixture
Coolant Capacity	21L
Heat Rejected To Exhaust System...	148kW(8288BTU/min)
Heat Rejected To Water&Oil.....	78kW(4368BTU/min)
Back Pressure	≤15kPa
Standby Power	176kW
Prime Power	160kW
Fuel Consumption(100%load).....	45.8L/h


Alternator



1000072129-AP1-A1

Alternator Manufacturer/Brand	Leroy Somer
Alternator Model	LSA46.3S3
Exciter.....	Brushless
Cooling Fan	Cast alloy aluminum
Windings100% copper
Insulation Class	H
Winding Pitch.....	2/3
Terminals	12
Drip Proof	IP23
Altitude.....	≤1000m
Overspeed2250rpm
Telephone Interference.....	THF<2%;TIF<50

PLC-7420 Control System

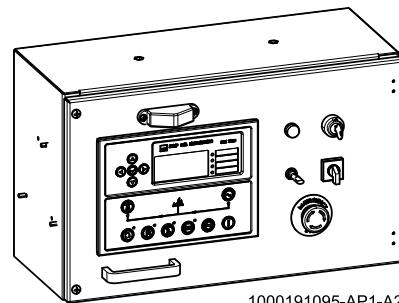


1000191095-AP1-A2

PLC-7420 is an advanced control module based on microprocessor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, and automatically start the engine when the mains is abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.


- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol

4 Overall Dimensions


1000024483-DR1-D2

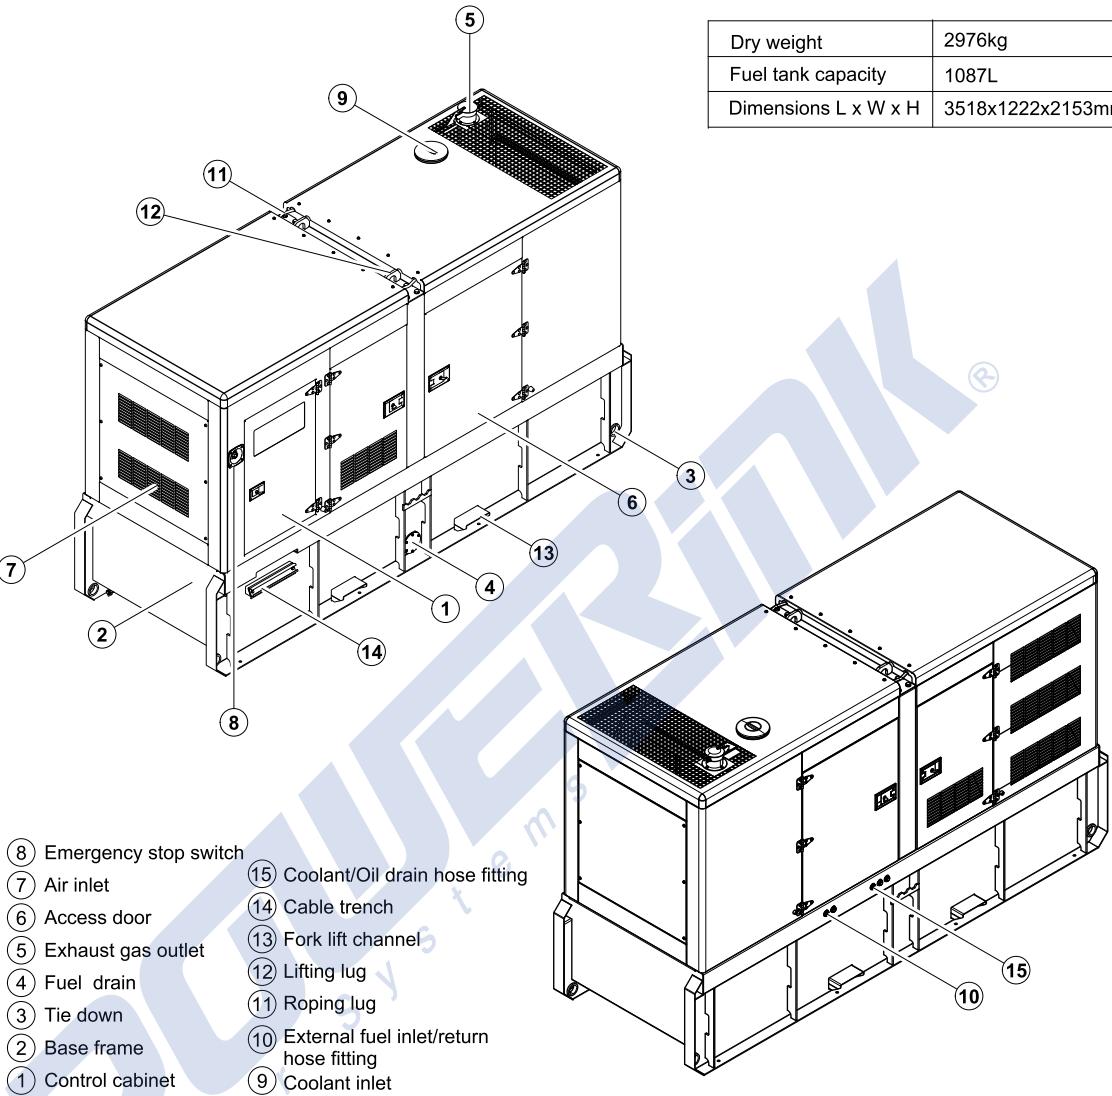

Dry weight	2976kg
Fuel tank capacity	1087L
Dimensions L x W x H	3518x1222x2153mm

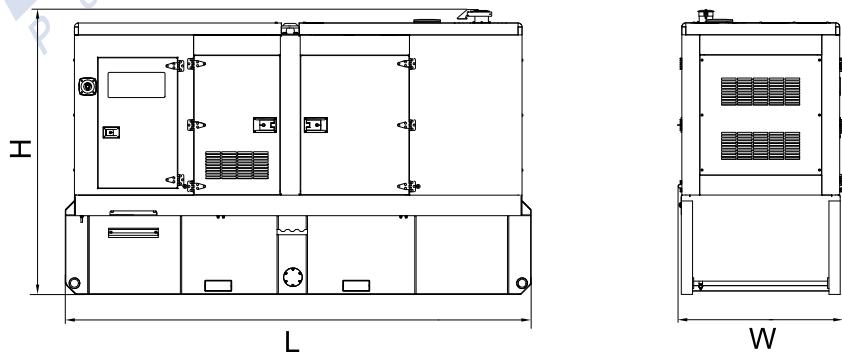

5 Control System

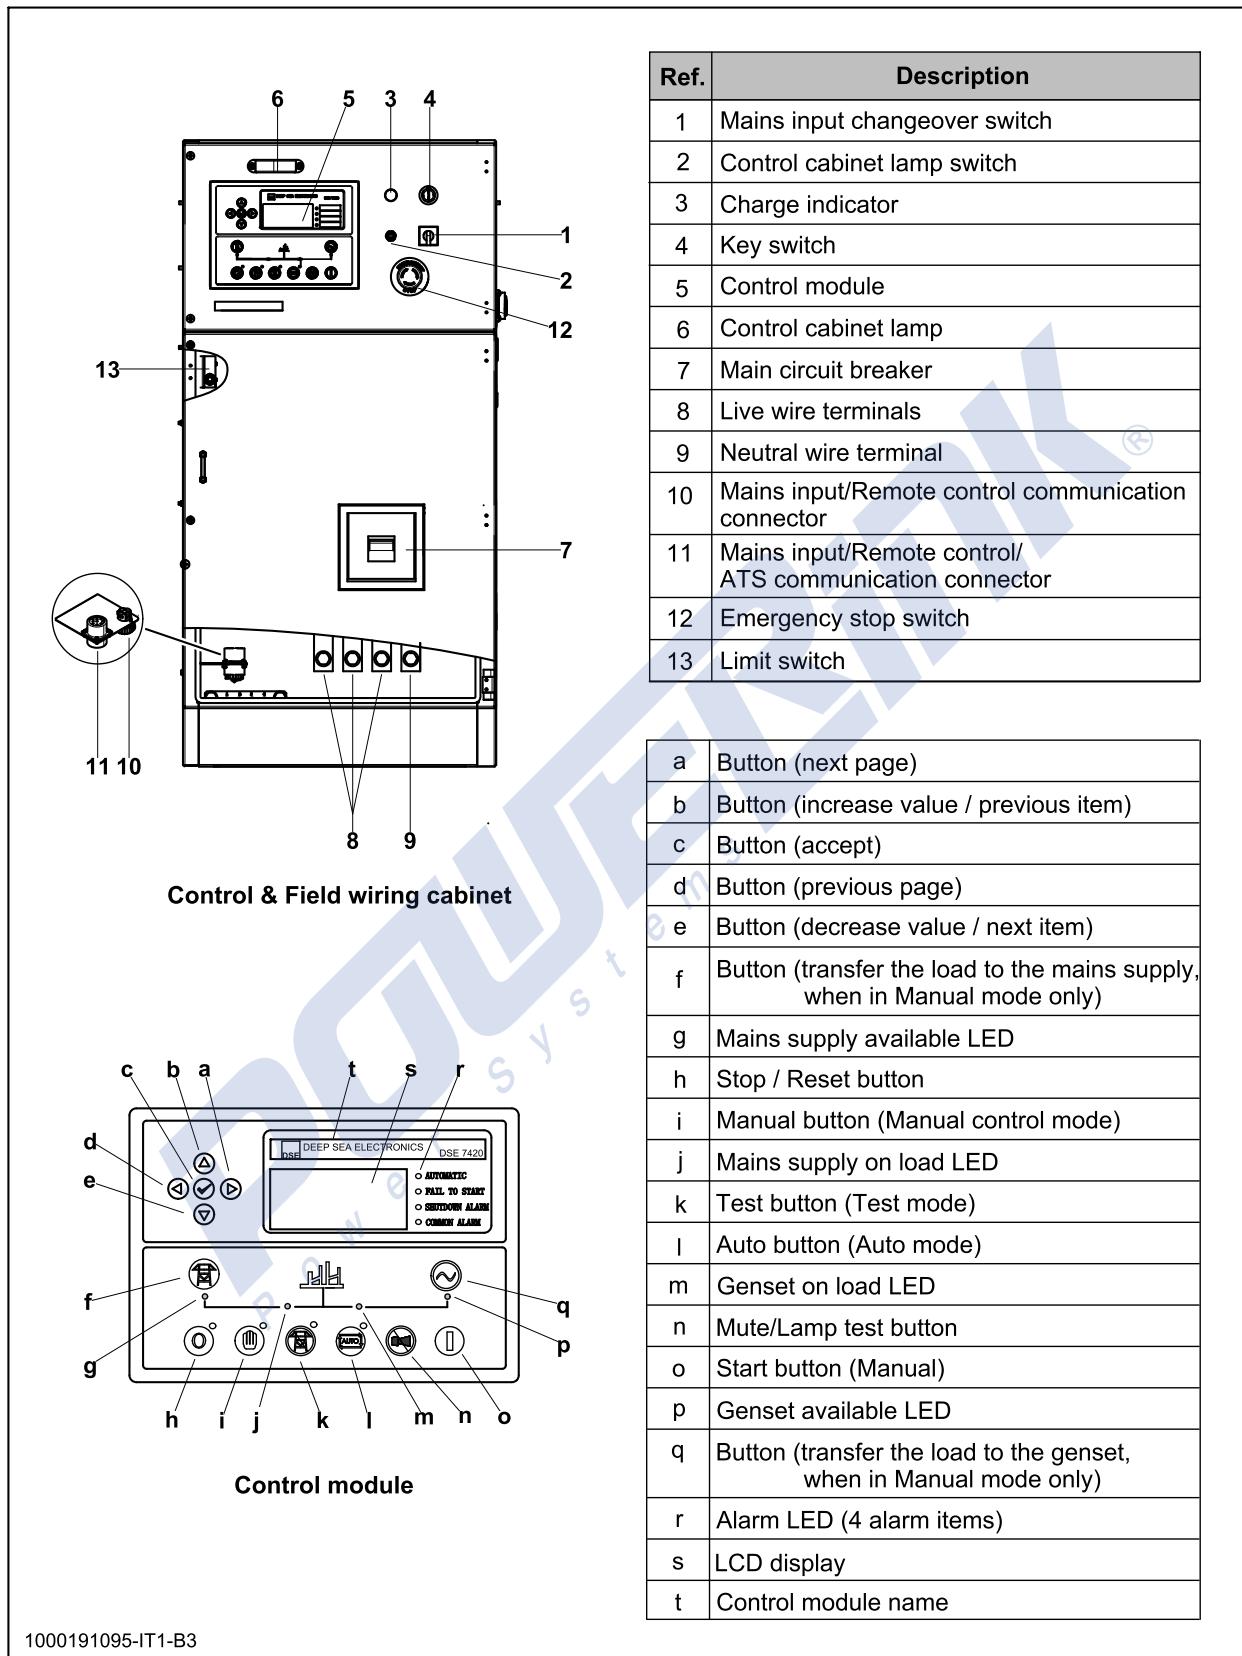

1000024483-D2-E
06.2019

<http://www.powerlinkworld.com>

*Specification may change without prior notice. For more info.,
contact Power Link or your local distributors please.*